


surface mounted – SM

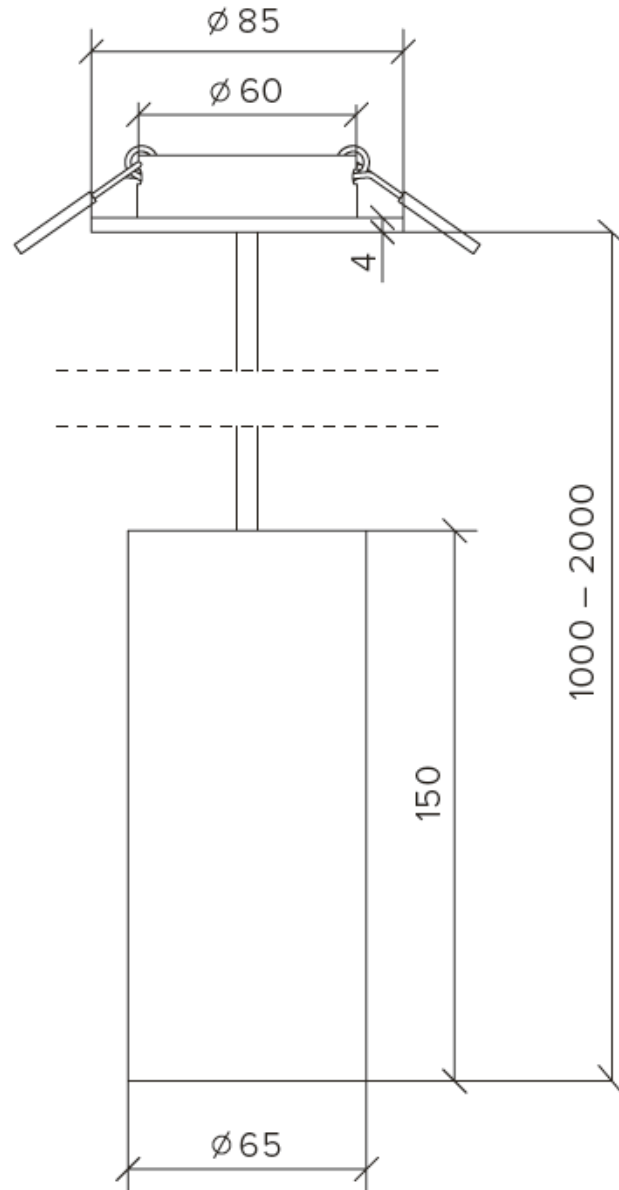

ceiling mounted – CM

GENERAL

Dimmable

Luminaire ROUND:

surface mounted, ceiling mounted

Indoor (IP 20)

LED

high-power LED

710 lm, up to 85 lm/W

2700 K

CRI ≥ 90

Binning initial ≤ 3 MacAdam

ESTIMATED LED LIFETIME

L70B50 / 50 000 h

OPTICAL

direct illumination

microprismatic (UGR < 19)

ELECTRICAL

high power 230 V

PHYSICAL

Black steel/ raw steel

forged steel

1060g each