


Tube coudée 135 °






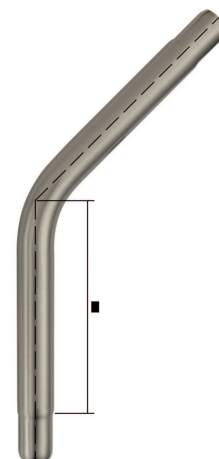











Laiton nickelé mat



Désignation	Commande/Réf. Fabricant	∅ A	CHF
Tube coudée 135 °	23.1846/11	11 75	pc 79.50
Tube coudée 135 °	23.1846/13	13 86	pc 83.00
Tube coudée 135 °	23.1846/20	20 141	pc 96.50
Tube coudée 135 °	23.1846/25	25 147	pc 102.50
Tube coudée 135 °	23.1846/30	30 152	pc 108.00
Tube coudée 135 °	23.1846/40	40 174	pc 140.00



Explication des signes

-  Largeur totale
-  Largeur rosace
-  Hauteur totale
-  Hauteur rosace
-  Longueur de la poignée
-  En saillie de la surface de montage
-  En saillie au milieu du trou/distance au canon
-  Profondeur encastrée
-  Distance du milieu du trou de vis du haut au milieu du trou de poignée
-  Diamètre (trou, tige, tube, corde, collet etc.)
-  Tige carrée/trou carré
-  Distance des trous de vis
-  Recouvrement
-  Epaisseur du matériel
-  Filetage, vis
-  Mesure A
-  Emballage/Rabais quantitatif